

ABOUT TIMES-7

Pushing the boundaries of RFID technology worldwide Times-7 are leaders in RFID antenna design and manufacture. Our patented award winning UHF antennas meet the needs of virtually any industry application; providing customers with fast accurate tracking of products, assets & people; empowering organizations to transform processes & reduce costs.

Our SlimLine range of antennas are unique in the RFID industry; offering high levels of performance & durability in an aesthetically superior form. Proven in a diverse & growing range of markets, applications include: retail & customer interaction, conference & people tracking, race timing, baggage handling, and logistic & supply chain asset management.

Times-7 Research Ltd
29 Railway Avenue
Lower Hutt 5010
New Zealand

NEW ZEALAND
P: +64 4 974 6566

USA/CANADA
P: +1 408 769 5025

E: info@times-7.com

www.times-7.com



The SlimLine A4030C

Part of the SlimLine range of multi-purpose antennas, the A4030C is a rugged high performance circularly polarized UHF antenna suitable for a wide range of RFID deployments. With a read range of up to 6 m / 19.5ft., and dimensions of only 280 mm / 11 in. square, the A4030C is an extremely versatile and compact antenna. A rear connector provides for ease of seamless installation with no visible cable.

Up to 6 m / 19.5 ft. read range

Just 12mm / 0.5 in. thick

Versatile & compact with superb aesthetics

Seamless installation using rear connector

Specifications


Physical / Environmental Specifications

Dimensions (L x W x D):	280 mm x 280 mm x 12 mm 11 " x 11 " x 0.5 "
Weight:	0.75kg / 1.6 lbs.
Radome Material:	Fire retardant ABS
Environmental Rating:	IP65
Operating / Storage Temperature:	-20° to +55°C / -30° to +65°C -4° to +131°F / -22° to +149°F
Connector type / position:	SMA female / Rear connector
Cable:	2 m SMA to RPTNC (included)


Electrical Specifications

Frequency Range:	864-869 MHz / 902-928 MHz
Polarisation:	Circular
Far-field Gain:	6.5 dBiC
Far-field 3 dB beamwidth:	60° in both planes
Typical VSWR across frequency range:	< 1.4:1
Front to back ratio:	26 dB
Axial Ratio:	< 2 dB at boresight
Nominal Impedance:	50 Ω
Anti-static protection:	Yes
Maximum Input Power:	6 W

E-field elevation & Azimuth Patterns

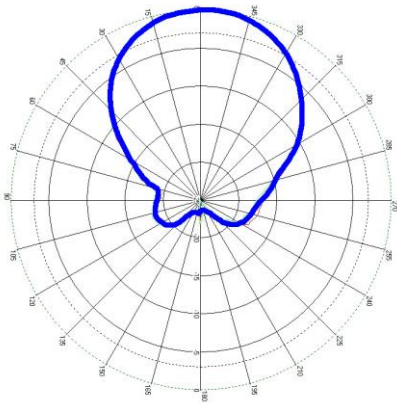

Vertical

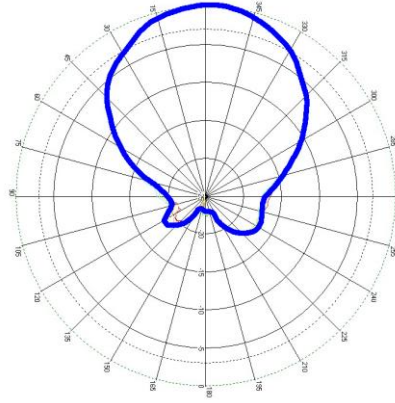


Horizontal

Ordering Information (please quote both product code & part no.)

Product Code	Band	Part No.
A4030C	ETSI 864-869 MHz	71269
A4030C	FCC 902-928 MHz	71270
Cable Accessories	Cable Type	Part No.
Cable 2 m, SMA to RPTNC	195 / 240	71436 / 71782
Cable 4 m, SMA to RPTNC	195 / 240	71437 / 71784
Cable 8 m, SMA to RPTNC	195 / 240	71438 / 71788

Applications

- Inventory Management
- Logistics & Supply Chain
- Healthcare (asset & people tracking)
- Retail / POS self service



OUR GLOBAL NETWORK

Constantly increasing market reach and influence in the global RFID industry, Times-7's international support spans The Americas, Europe, and Asia Pacific regions through our distributor, authorized reseller and integrated solutions provider network.

Times-7 Research Ltd
29 Railway Avenue
Lower Hutt 5010
New Zealand

NEW ZEALAND
P: +64 4 974 6566

NORTH AMERICA
P: +1 408 769 5025

E: info@times-7.com

www.times-7.com

The technical data contained in this publication is not a guarantee for which Times-7 Research Ltd assumes legal accountability. It is indicative of typical performance, and if required should be relied on for specific applications only after due verification.

All technical data, specifications and other information contained herein are deemed to be the proprietary intellectual property of Times-7 Research Ltd. No reproduction, copy or use thereof may be made without the express written consent of Times-7 Research Ltd.